


MON21.5T-IP66

21.5 "Full IP66 Close monitor with Projected Touch
VGA / HDMI input in stainless steel option 1000nits
for sunlight

FEATURES

21.5 "Stainless Steel Screen
IP66 Near Standard 250 Nits (Available with
1000nits On Ordering)
M12 Connector VGA / HDMI
Speaker IP65 2W
M12 Connecotrs
Projected Capacitive Touch
OSD on back
Vesa Mount 100x100mm (Option Yoke Mounting)
DC 9 ~ 36V
571x362x55mm

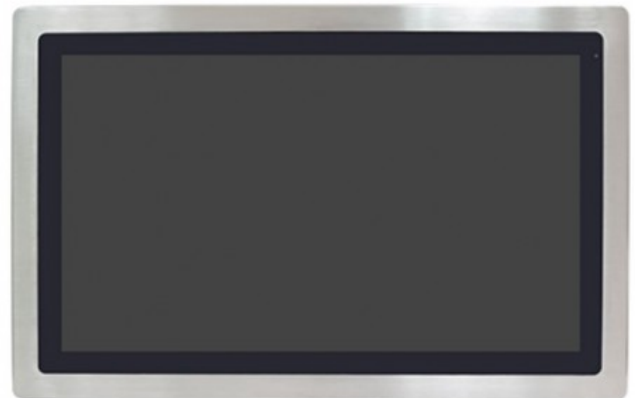

MON21.5T-IP66

SPECIFICATIONS

Antal farver	:	16.7M
Approval	:	CE/FCC class A
Dimensioner	:	571x362x55mm
Driftstemperatur	:	0~50 degrees
Kontrast	:	250 cd/m2 OPTION 1000
Synsfelt	:	178Hx178V
Touch	:	Projected Touch OPTION! Capacitive, Resistive, Glass
USB	:	Touch interface
Weight	:	9.5Kg